ALDM350/3 Series DRIVER

Replaces ALDM350HO series driver

- 0-10VDC Analog Control for intensity ~10% to 100%
- Current Regulating
- 24VDC
- DIN Rail Mount
- PNP/NPN Strobe or Continuous Mode

ELECTRICAL:

Input Voltage:	24 VDC -0.5 / +4V
Input Current:	0.5 Amp
Connection:	Screw terminals

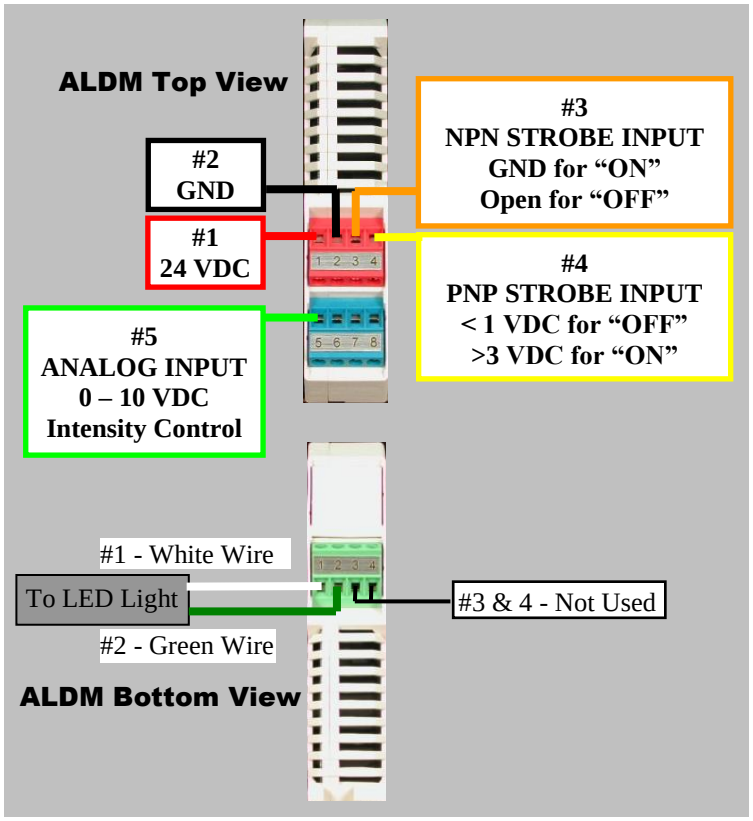

ALDM350/3 is compatible with the following lights:

LL16 – All Colors except -850 (IR)
SP3.25 – All Colors except -850 (IR)

NOTE:
Jumper 24VDC to PNP Strobe Input or GND to NPN Strobe input for light to remain in constant "ON" state.

Strobe is Pulse Width Duration – Light will remain "on" for duration of signal or pulse.

Note: 24V power supply return and GND reference for 0-10V input must be connected to pin #2 (GND) of red connector.

Note: Brown, Black and Blue wires are not used on ALDM350/3 Driver

Warning!!!

USE ONLY SPECTRUM ILLUMINATION LDM DRIVER WITH MONSTER LIGHTS.
DO NOT CONNECT MONSTER LIGHTS DIRECTLY TO 24VDC!

Spectrum Illumination • 5114 Industrial Park Rd. • Montague, MI 49437
Phone 231-894-4590 Fax 231-894-4582
www.spectrumillumination.com

Rev. Date: 2009-05-21

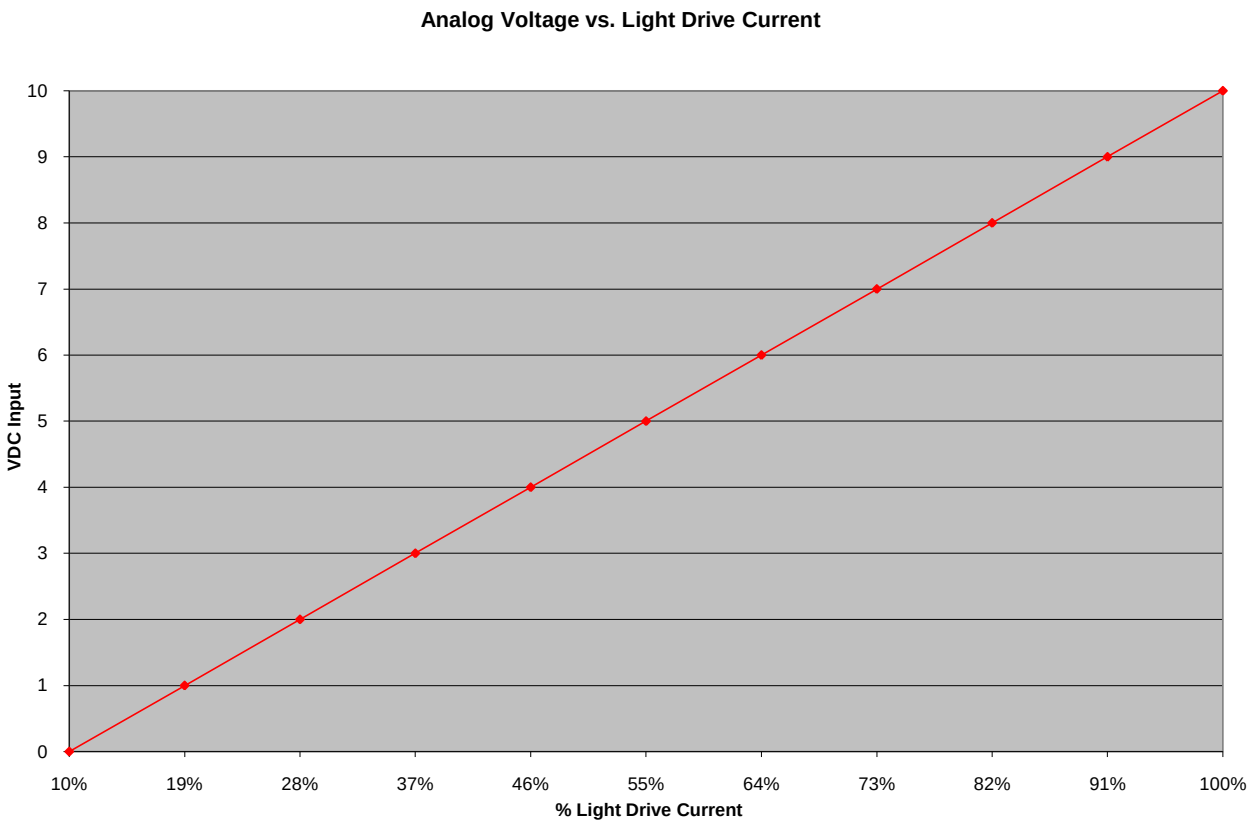

Wiring Block Diagram

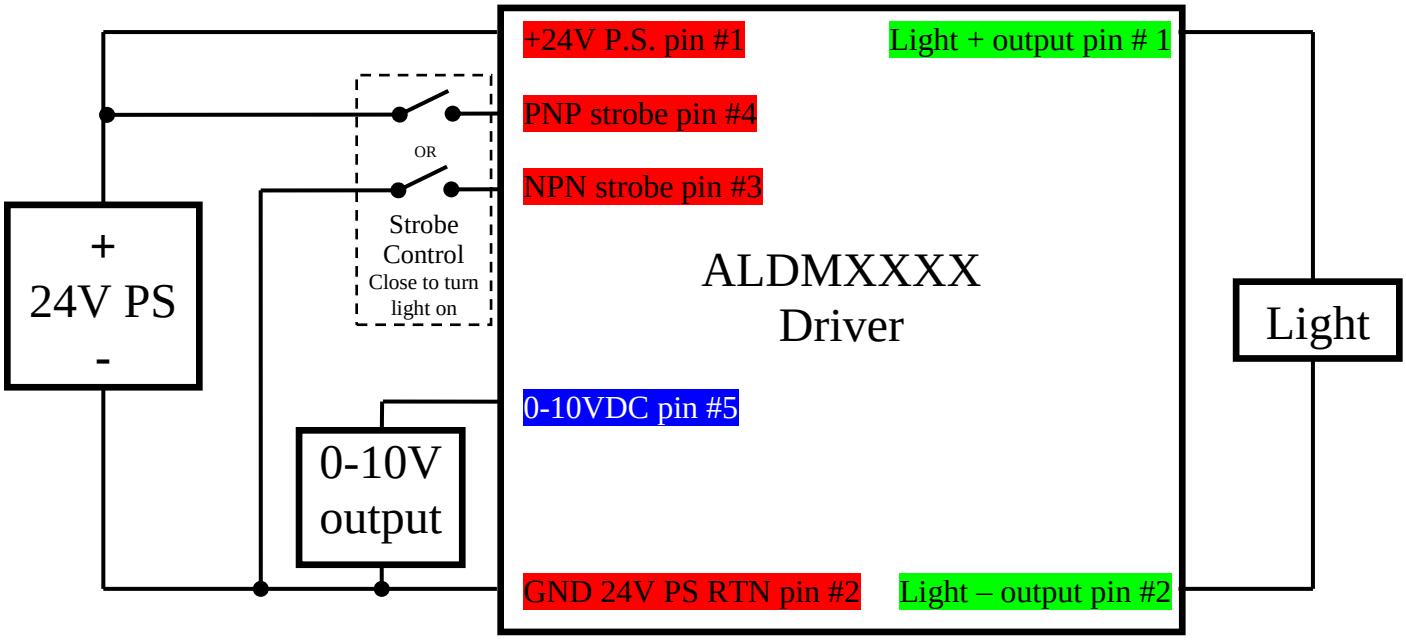

Spectrum Illumination • 5114 Industrial Park Rd. • Montague, MI 49437
Phone 231-894-4590 Fax 231-894-4582
www.spectrumillumination.com

Rev. Date: 2009-05-21