

# Wash Down Back Light 4"x8" Series

## ELECTRICAL:

Input Voltage: 24VDC (25VDC Maximum)

Input Current: **-470** 920mA typical (1120mA Maximum); **-530** 520mA typical (640mA Maximum)


**-660** 640mA typical (800mA Maximum); **-880** 800mA typical (960mA Maximum)

**-WHI** 1280mA typical (1440mA Maximum)

Connector: Quick Connect, 4 pin Euro / Micro

Wiring:

Pin #	Wire Color	Function
1	Brown	+24VDC
2	N/C	N/C
3	Blue	+24VDC return (GND)
4	Black	PNP STROBE INPUT: < 1 VDC for "OFF" +24VDC for "ON"



## MECHANICAL:

Dimensions: <http://www.spectrumillumination.com>

IPC-68 rated Enclosure

USFDA compliant enclosure, gaskets and hardware

316 Stainless Steel

Acrylic Diffuser

Silicon Gaskets

## ILLUMINATION:

Light Source: LED – 4 Colors, IR

Quantity LED's: 384

Light Emitting Pattern: 4" x 8" / 101mm x 203mm

LED Life: up to 100,000 hours\*.

\*Contact us for LED life information

## DIFFUSERS:

Polarizer – Option /P


## PART NUMBER DESIGNATION:

**WBL48-XXX**

XXX = Light Color -470, -530, -660, -880 & -WHI\*

\* Note: White is not for continuous operation due to short LED life (10,000 hrs @ 80% output at 25°C).

Strobing at <10% duty cycle is highly recommended. Higher duty cycles will cause excess heat and shorten LED life.

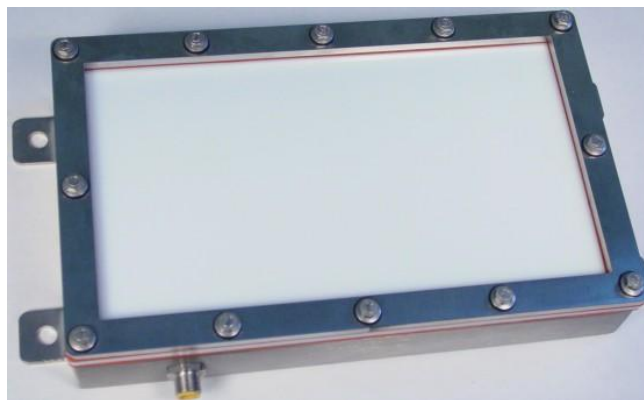

Light includes 4 meter cable, 8, 15 and 30 meter cables are available at additional cost

Color	Dash #	$\lambda$ Dominant Typical	$\lambda$ Dominant Range	Spectral Half-width $\Delta\lambda_{1/2}$	$\lambda$ Peak Typical	Units
Infrared	-880	n/a	n/a	50	880	nm
Red	-660	643	n/a	20	660	nm
Green	-530	525	520-535	35	530	nm
Blue	-470	470	465-475	25	468	nm
White	-WHI	Color Temp 8500 K typical				

Spectrum Illumination • 5114 Industrial Park Rd. • Montague, MI 49437

Phone 231-894-4590 • Fax 231-894-4582

[www.spectrumillumination.com](http://www.spectrumillumination.com)

Rev. Date: 2009-05-29